



FasTop™ Systems

FasTop™ Flooring Systems represent a family of flooring systems all built using a revolutionary cementitious urethane resin technology. FasTop system designs include a 3/16"–3/8" slurry available in standard and decorative finishes and a 1/4"–3/8" mortar. All systems are acceptable for use in USDA inspected facilities, breathable, installed quickly, environmentally friendly, and are not susceptible to problems associated with moisture from concrete. These unique systems provide the protection of historical resinous floor systems, yet are user friendly and offer insurance against loss of bond due to moisture.


Features

- Acceptable for use in USDA inspected facilities
- Simple to use for fast installation which reduces labor costs
- Limited temperature constraints for installation compared to other epoxy or urethane systems
- No lost days for moisture mitigation system application
- Can be applied to green concrete
- Moisture tolerant during and after installation — No moisture testing required
- Resistance to thermal shock and thermal cycling


Benefits

- Low-odor water-based urethane cement
- Decorative or solid color with a gloss or satin finish in smooth or skid-inhibiting textures
- Rapid installation and cure for quick return to service
- Resistance to out-gassing, fish-eyes, and CO² entrapment
- Installation between 40°F and 85°F
- Can be applied over damp substrates
- Floor and moisture mitigation system in one easy-to-use system


FasTop™ Mortar

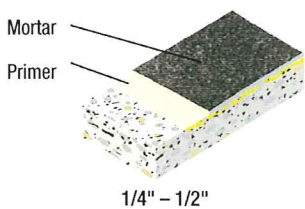

FasTop™ MVT

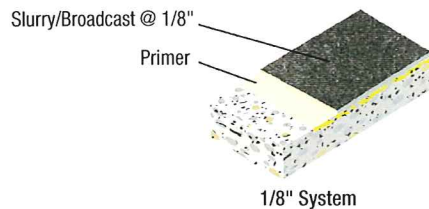

FasTop™ Ceramic Carpet

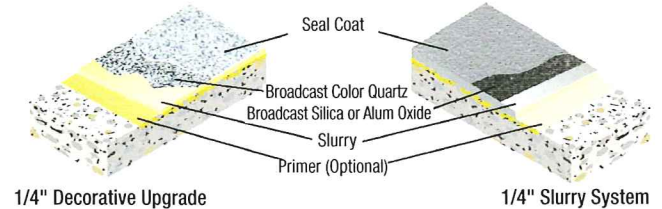

FasTop™ Slurry System

Also available with a Decorative Mosaic finish

3/16" or 1/4" Non-Skid

FasTop Flooring Systems™

FasTop Flooring Systems are engineered using revolutionary water-based urethane cement technology to provide efficient solutions to MVE challenges while meeting the performance criteria expected of traditional resinous floor systems. Offering faster installation than standard epoxy floor systems, these breathable, chemical- and wear-resistant materials can be installed and returned to service in as little as 8 hours. Every product available in the FasTop System has zero VOCs and low odor. FasTop Systems are easy to install, provide a seamless easy-to-clean surface, and can even be applied to "green" concrete without taking moisture readings. FasTop stand-alone systems include 3/16" to 3/8" slurry available in solid color or decorative finish options and a 1/4" to 3/8" mortar.

Projects that use FasTop Systems

- National Meat Processor – Various Locations – 2.5 million sq. ft.
- Yum Brands, Louisville, KY – Various Locations – 40,000 sq. ft.
- Coca-Cola – Atlanta, GA – Various Locations – 70,000 sq. ft.
- Gerber Foods – Fremont, MI – 12,500 sq. ft.
- Nestlé – Anderson, IN – 800,000 sq. ft.
- Koch Foods – Various Locations – 60,000 sq. ft.
- Pepsi Co. – Various Locations – 55,000 sq. ft.
- Jackson-Madison County General Hospital – Jackson, TN – 4,500 sq. ft.
- Hermitage Hotel, Nashville, TN – 5,500 sq. ft.

At Sherwin-Williams, we have products to meet your flooring needs and the people to exceed your expectations for service and satisfaction.

And with every Sherwin-Williams product comes expert advice and service that is second to none. Our knowledgeable flooring professionals will be there to answer your questions, assess your needs, and recommend a flooring system that meets your individual requirements. And certified contractors will make sure the installation is done right.

If you have any questions regarding local and federal environmental compliance regulations, ASTM standards, and recommended trade and association practices, our technical field representatives can help. Backed by a team of General Polymers Flooring Specialists (accredited by SSPC International), our reps have the in-depth answers you're looking for.

In other words, when you specify a flooring system from Sherwin-Williams, you're not just getting a floor. You're getting the whole company.



To learn more, visit us at

www.sherwin-williams.com/protective
or call 1-800-524-5979
to have a representative contact you.

©2010 The Sherwin-Williams Company
Protective & Marine Coatings 4/10