


## RESUFLOOR GARD MR

Resufloor Gard MR is a seamless, smooth or textured pigmented flooring system designed for use in light duty/light traffic mechanical rooms consisting of an optional primer/moisture barrier for use over green concrete, an elastomeric waterproofing membrane, a 100% solids epoxy wear coat with an optional non-slip broadcast, and a recommended topcoat for added abrasion and UV resistance.

Resufloor Gard Mechanical Room systems are designed to reduce steps for a quick installation and work seamlessly around floor drains. Tech support is available to assist with construction documents and incorporate CAD details when required, eliminating rework and future repairs.

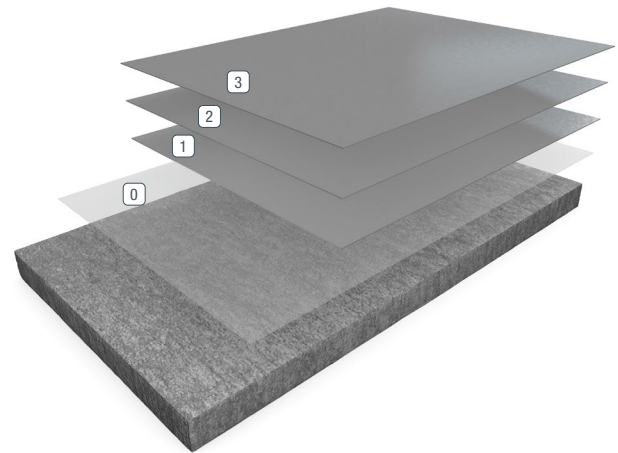

- 0 Primer
- 1 Base Coat/Broadcast
- 2 Second Broadcast
- 3 Grout/Seal Coat

### BENEFITS


- Light duty — Designed for light traffic and basic abrasion resistance
- Quick install — Reduced installation steps for less downtime during installation
- Waterproofing membrane — Stops water from penetrating the surface of the coating and damaging the substrate
- Non-slip — Optional textured finishes aid in a safer floor, even when wet
- Variable install window — Coat over green or 28+-day-old concrete

### USES

- Mechanical rooms
- Server rooms
- Data centers
- Equipment rooms
- Chiller rooms



FEATURED COLORS

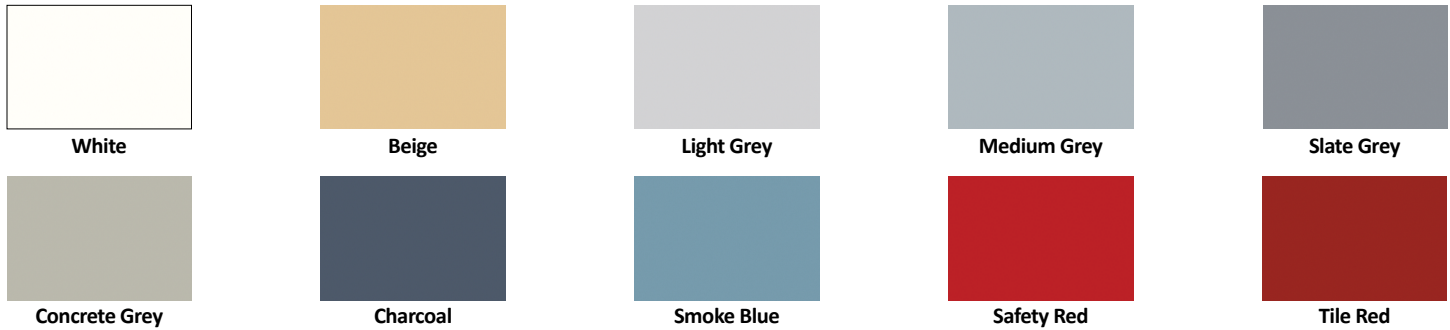

Standard and custom colors available. Please see the Resuflo Standard Industrial Color Card for details or envision a color in your space using our Flooring Visualizer Tool at floorvisualizer.sherwin-williams.com. This reproduction approximates the actual color. Factors such as the type of product, degree of gloss, texture, size and shape of area, lighting, heat or method of application may cause color variance. Contact your Sherwin-Williams representative for details.

ABOUT CHEMICAL RESISTANCE

Sherwin-Williams High Performance Flooring offers a broad range of systems to accommodate nearly every industrial, commercial and institutional setting. Each flooring system includes a standard chemical-resistant topcoat or surface proven to perform under typical conditions.

Important considerations:

- The combination of cleaning solutions, sanitizing chemicals, processing substances and products found in any operational setting is unique.
- Knowing exactly which materials are present — as well as their concentrations and typical exposure times before cleanup — is critical for proper flooring system selection.
- During the specification process, a flooring system’s standard chemical-resistant topcoat may get replaced with one better suited to unique facility conditions.

The ability of a flooring system to perform as designed relies heavily on proper selection. Matching each use case with the right chemical-resistant flooring is key to having a facility looking great and functioning at peak level over the long term.

See our Chemical Resistance Guide and other technical resources on our website. Connect with a Sherwin-Williams High Performance Flooring expert for help with specifying an optimal flooring system for your facility.

THE SHERWIN-WILLIAMS DIFFERENCE

Sherwin-Williams High Performance Flooring delivers world-class industry subject matter expertise, unparalleled technical and specification service, and unmatched regional commercial team support to our customers around the globe.

United States & Canada

sherwin-williams.com/resin-flooring  
swflooding@sherwin.com

TYPICAL PHYSICAL PROPERTIES

|   |                         |
|---|-------------------------|
| Tensile Strength, ASTM D-638                        | 3,000 psi               |
| Tensile Strength, ASTM C-307                        | 1,950 psi               |
| Tensile Elongation, ASTM D-412                      | 150% (with Resuflo EOC) |
| Indentation/Impact Resistance, MIL D-3134           | Pass/No Cracking        |
| Water Absorption, ASTM D-570                        | 0.04%                   |
| Abrasion Resistance (CS-17 Wheel), ASTM D-4060      | 35 mg loss              |
| UV Resistance                                       | None                    |
| Static Coefficient of Friction*, ANSI B101.1        | > 0.6                   |
| Dynamic Coefficient of Friction - Wet*, ANSI A326.3 | > 0.42                  |

\*Sherwin-Williams High Performance Flooring systems can be built to meet or exceed the requirements of Static or Dynamic Coefficient of Friction testing per installation. Contact your Sherwin-Williams territory sales manager or tech representative for more information on alternative textures, grit/grip additives, or smooth coatings for your specific environment. A sample should always be obtained and tested prior to purchase for any non-slip flooring system.